

# **AC6368A Datasheet**

**Zhuhai Jieli Technology Co.,LTD**

**Version: V1.2**

**Date: 2024.03.06**

# AC6368A Features

## CPU

- 32-bit DSP supports hardware Float Point Unit (FPU)
- Up to 160MHz programmable processor
- 64 Vectored interrupts
- 4 Levels interrupt priority

## Bluetooth

- Compliant with Bluetooth V5.4+BR+EDR+BLE specification
- Meet class1 class2 and class3 transmitting power requirement
- Support GFSK and  $\pi/4$  DQPSK all packet types
- Provides +6dbm transmitting power
- receiver with -90dBm sensitivity
- Fast AGC for enhanced dynamic range
- Supports  
a2dp\avctp\avdtp\avrcp\hfp\spp\smp\att\gap\gatt\rfcomm\sdp\l2cap profile

## Temperature

- Operating temperature: -40°C to +85°C
- Storage temperature: -65°C to +150°C

## Peripherals

- One full speed USB 2.0 OTG controller
- Six multi-function 32-bit timers, support capture and PWM mode
- Three full-duplex basic UART, UART0 and UART1 supports DMA mode
- One hardware IIC interface supports host and device mode
- 10-bit ADC for analog sampling
- External wake up/interrupt on all GPIOs

## PMU

- Low voltage LDO for internal digital and analog circuit supply
- 3uA current consumption in the soft-off mode
- Built-in LDO for the core, I/O, Bluetooth and flash
- VBAT is 2.2V to 3.4V
- VDDIO is 2.2V to 3.4V

## Packages

- SOP8

## Applications

- Bluetooth IOT

## Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

# 1、 Pin Definition

## 1.1 Pin Assignment



Figure 1-1 AC6368A Package Diagram

## 1.2 Pin Description

Table 1-1 AC6368A Pin Description

PIN NO.	Name	I/O Type	Drive (mA)	Function	Other Function
1	VBAT	P	/		Battery Power Supply
	VDDIO	P	/		IO Power 3.3v
2	PB1	I/O		GPIO (pull up)	Long Press Reset; ADC5: ADC Input Channel 5; UART0RXB: Uart0 Data In(B);
3	VSS	P	/		Ground
4	BT_RF	/			BT Antenna
5	BTOSCI	I			BT OSC In
6	BTOSCO	O			BT OSC Out
7	USBDM	I/O		USB Negative Data (pull down)	IIC_SDA_A: IIC SDA(A); SPI2_DOB: SPI2 Data Out(B); ADC14: ADC Input Channel 14; UART1RXD: Uart1 Data In(D);
8	USBDP	I/O		USB Positive Data (pull down)	IIC_SCL_A: IIC SCL(A); SPI2_CLKB: SPI2 Clock(B); ADC13: ADC Input Channel 13; UART1TXD: Uart1 Data Output(D);
	PA6	I/O		GPIO	ADC4: ADC Input Channel 4; CAP4: Timer4 Capture; UART0RXA: Uart0 Data In(A);

### Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

## 2、Electrical Characteristics

### 2.1 Absolute Maximum Ratings

Table 2-1

Symbol	Parameter	Min	Max	Unit
T <sub>opt</sub>	Operating temperature	-40	+85	°C
T <sub>stg</sub>	Storage temperature	-65	+150	°C
V <sub>BAT</sub>	Supply Voltage	-0.3	3.6	V
V <sub>3.3IO</sub>	3.3V IO Input Voltage	-0.3	3.6	V

Note : The chip can be damaged by any stress in excess of the absolute maximum ratings listed below

### 2.2 Recommended Operating Conditions

Table 2-2

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
V <sub>BAT</sub>	Voltage Input	2.2	3.0	3.4	V	
V <sub>VDDIO</sub>	Voltage Input	–	3.0	–	V	

### 2.3 IO Input/Output Electrical Logical Characteristics

Table 2-3

IO input characteristics						
Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
V <sub>IL</sub>	Low-Level Input Voltage	-0.3	–	0.3* VDDIO	V	VDDIO = 3.3V
V <sub>IH</sub>	High-Level Input Voltage	0.7* VDDIO	–	VDDIO+0.3	V	VDDIO = 3.3V
IO output characteristics						
V <sub>OL</sub>	Low-Level Output Voltage	–	–	0.33	V	VDDIO = 3.3V
V <sub>OH</sub>	High-Level Output Voltage	2.7	–	–	V	VDDIO = 3.3V

#### Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

## 2.4 Internal Resistor Characteristics

Table 2-4

Port	General Output	High Drive	Internal Pull-Up Resistor	Internal Pull-Down Resistor	Comment
PA6 PB1	8mA	24mA	10K	10K	1、PB1 default pull up 2、USBDM & USBDP default pull down 3、 internal pull-up/pull-down resistance   accuracy $\pm 20\%$
USBDP	4mA	-	1.5K	15K	
USBDM	4mA	-	180K	15K	

## 2.5 BT Characteristics

### 2.5.1 Transmitter

#### Basic Rate

Table 2-5

Parameter		Min	Typ	Max	Unit	Test Conditions
RF Transmit Power		-	4	6	dBm	25°C, Power Supply
RF Power Control Range		-	20	-	dB	
20dB Bandwidth		-	950	-	KHz	
In-band spurious Emissions (BQB Test Mode RF_Tx Power=4dBm)	F=F <sub>0</sub> ±1MHz	-	-20	-	dBm	VBAT=3.7V
	F=F <sub>0</sub> ±2MHz	-	-45	-	dBm	2441MHz
	F=F <sub>0</sub> ±3MHz	-	-35	-	dBm	DH5
	F=F <sub>0</sub> ±>3MHz	-	-45	-	dBm	

#### Enhanced Data Rate

Table 2-6

Parameter		Min	Typ	Max	Unit	Test Conditions
Relative Power		-	-1	-	dB	25°C, Power Supply
$\pi/4$ DQPSK Modulation Accuracy	DEVM RMS	-	4	-	%	
	DEVM 99%	-	10	-	%	
	DEVM Peak	-	7	-	%	
In-band spurious Emissions (BQB Test Mode RF_Tx Power=4dBm)	F=F <sub>0</sub> ±1MHz	-	-4	-	dBm	VBAT=3.7V 2441MHz
	F=F <sub>0</sub> ±2MHz	-	-30	-	dBm	
	F=F <sub>0</sub> ±3MHz	-	-30	-	dBm	2DH5
	F=F <sub>0</sub> ±>3MHz	-	-37	-	dBm	

#### Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

## 2.5.2 Receiver

### Basic Rate

Table 2-7

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity		-	-88	-	dBm	25°C, Power Supply VBAT=3.7V 2441MHz DH5
Co-channel Interference Rejection		-	6	-	dB	
Adjacent Channel selectivity C/I	+1MHz	-	-6	-	dB	
	-1MHz	-	-8	-	dB	
	+2MHz	-	-17	-	dB	
	-2MHz	-	-21	-	dB	
	+3MHz	-	-15	-	dB	
	-3MHz	-	-31	-	dB	

### Enhanced Data Rate

Table 2-8

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity		-	-90	-	dBm	25°C, Power Supply VBAT=3.7V 2441MHz 2DH5
Co-channel Interference Rejection		-	9	-	dB	
Adjacent Channel selectivity C/I	+1MHz	-	-10	-	dB	
	-1MHz	-	-13	-	dB	
	+2MHz	-	-11	-	dB	
	-2MHz	-	-21	-	dB	
	+3MHz	-	-13	-	dB	
	-3MHz	-	-40	-	dB	

### Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

## 2.5.3 BLE

### 1M Data Rate

Table 2-9

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity		-	-91	-	dBm	25°C Power Supply VBAT=3.7V 2440MHz
RF Transmit Power		-	6	-	dBm	
In-band Spurious Emission	M-N =2MHz	-	-41	-	dBm	
	M-N ≥3MHz	-	-40	-	dBm	
Modulation Characteristics	Δf1 avg	-	250	-	KHz	
	Δf2 99%	-	210	-	KHz	
	Δf1avg/Δf2avg	-	0.9	-	/	
Carrier Frequency Offset		-50	-	+50	KHz	
Frequency Drift		-25	-	+25	KHz	
Frequency Drift Rate		-5	-	+5	KHz/50us	

### 2M Data Rate

Table 2-10

Parameter		Min	Typ	Max	Unit	Test Conditions
Sensitivity		-	-89	-	dBm	25°C Power Supply VBAT=3.7V 2440MHz
RF Transmit Power		-	6	-	dBm	
In-band Spurious Emission	M-N =4MHz	-	-45	-	dBm	
	M-N =5MHz	-	-45	-	dBm	
	M-N ≥6MHz	-	-45	-	dBm	
Modulation Characteristics	Δf1 avg	-	500	-	KHz	
	Δf2 99%	-	430	-	KHz	
	Δf1avg/Δf2avg	-	0.9	-	/	
Carrier Frequency Offset		-50	-	+50	KHz	
Frequency Drift		-25	-	+25	KHz	
Frequency Drift Rate		-5	-	+5	KHz/50us	

### Long Range

Table 2-11

Parameter	Min	Typ	Max	Unit	Test Conditions
Sensitivity LE 125K(S8)	-	-99	-	dBm	VBAT=3.7V,25°C
Sensitivity LE 500K(S2)	-	-95	-	dBm	2440MHz


### Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.



## 3、 Package Information

### 3.1 SOP8

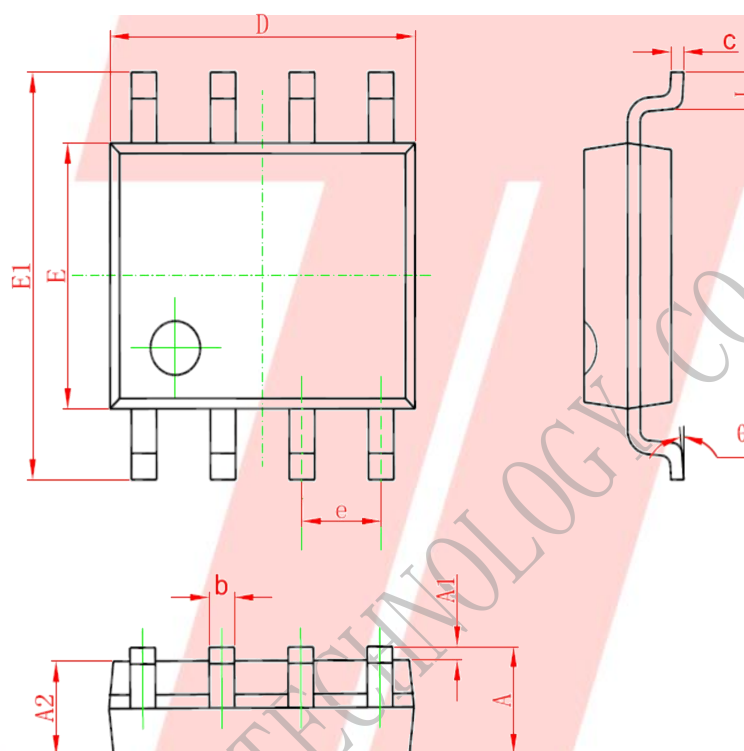

Symbol	Dimension In Millimeters		Dimension In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27TYP		0.050TYP	
L	0.400	1.270	0.016	0.050
$\theta$	0°	8°	0°	8°

Figure 3-1 AC6368A Package

#### Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

## 4、 Revision History

Date	Revision	Description
2020.07.03	V1.0	Initial Release
2022.07.19	V1.1	Update Bluetooth Feature
2024.03.06	V1.2	Update Bluetooth Feature, Add BLE Parameter

### Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.